


SINGLE/DOUBLE VALVE FLOAT SHOE

The Float Shoe is installed at the bottom of the string and guides the way running in the hole. The float shoe includes one-way valve, the valve can hold pressure in one direction.



FEATURES:

- Float shoes facilitate smooth drilling;
- Larger flow area;
- Positive direction open pressure <300PSI[2.0MPa];
- Maximum pressure rating 7,250PSI[50.0MPa];
- Maximum temperature rating of 400°F.

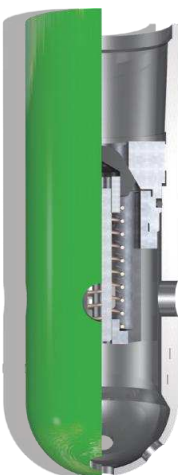

Specification			
tubing Size		Max.OD	
in	mm	in	mm
3 1/2	88.90	4.252	107.95
		4.500	114.30
4	101.60	4.646	118.00
4 1/2	114.30	5.000	127.00
		5.250	133.35
5 1/2	139.70	6.300	160.02